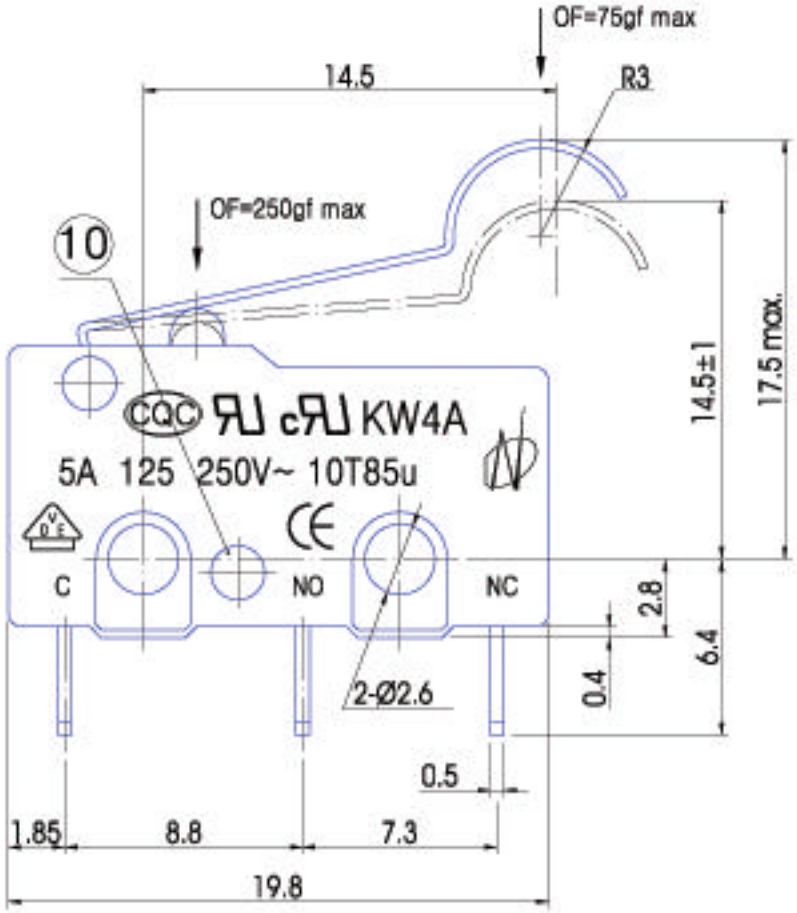

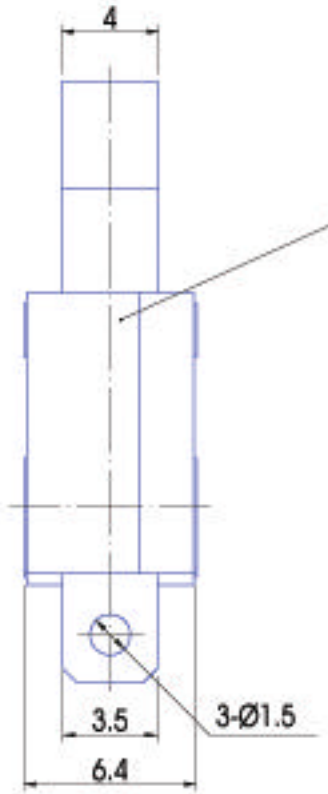

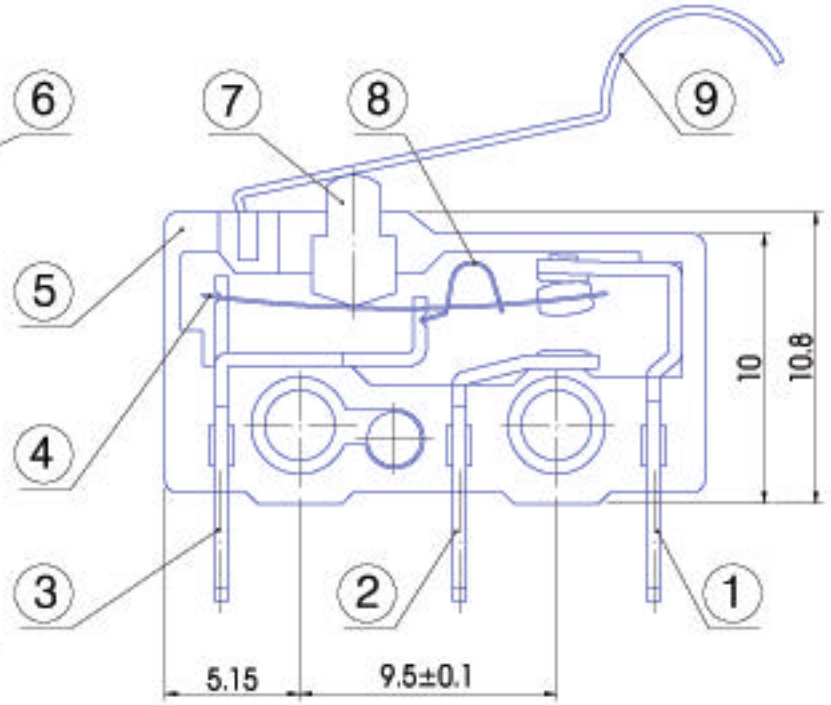

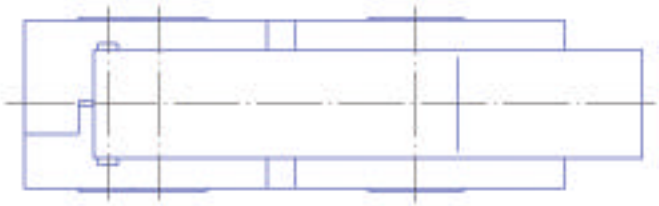

SPECIFICATION

Rating	5A 125VAC (UL, cUL) 5A 250VAC (VDE, CE, CQC)
Insulation Resistance	>100M ohm DC500V
Withstand Voltage	AC500V 1 minute
Contact Resistance	30m ohm max
Life	10,000 cycles (Electrical)
Operating Force	250 gf max

SAFETY STANDARD APPROVAL:

NO	PART NAME	QTY	MATERIAL	REMARKS
10	RIVET	1	Al	
9	SIMULATED LEVER	1	Stainless Strip	
8	ACTUATING SPRING	1	QBe2	
7	PIN PLUNGER	1	PPS	Black
6	UPPER HOUSING	1	PBT + GF30%	Black
5	LOWER PLATE	1	PBT + GF30%	Black
4	MOVABLE CONTACT ARM	1	QBe2 / AgCdO12	
3	COM TERMINAL	1	Brass	Ag Plated
2	N.O. TERMINAL	1	Brass strip / AgCdO12/Cu	Ag Plated
1	N.C. TERMINAL	1	Brass strip / AgCdO12/Cu	Ag Plated

DWN: Z.L.Y.			
CHKD: W. Y.	UNIT: mm	TITLE:	MICRO SWITCH
APVD: C.S.C.	SCALE:	PART NO.:	KW4A-Z6S